

Ceramic Urinal with Automatic Flushing Unit SLP 17




SLP 17 - DOMINO

Characteristics

- system reacts to the user attendance in front of the urinal at a maximum distance of 0,7 m, minimum stay time in active range is 7,5 s
- water flows after the user leaves active range
- adjustable flushing time 0,5 - 15,5 s
- parameters adjustment by remote control SLD 03
- automatic hygiene flushing after 24 hours non-use
- monitoring of battery capacity (for models with index B)

Installation Drawing

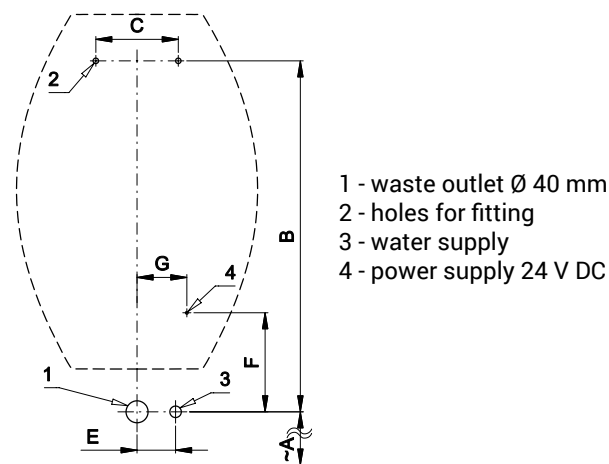

Dimensions (mm)	A	B	C	E	F	G
SLP 17 - DOMINO	420	638	150	70	180	90

* for the height of the front of the urinal 650 mm above the floor

Supply Specification

- SLP 17 - Supply No. 01170 ceramic urinal, flushing head with electronics, electromagnetic valve, angle valve,
SLP 17B - Supply No. 11176 connecting hoses, mounting set, 4 pcs. AA alkaline batteries 1,5 V, 2700 mAh (SLP 17B)

Recommended Accessories

- SLZ 01Y - Supply No. 05012 power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z - Supply No. 05011 power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y - Supply No. 05042 power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z - Supply No. 05041 power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X - Supply No. 10049 power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 - Supply No. 05060 power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 03 - Supply No. 07030 remote control for an adjustment of parameters
SLA 11 - Supply No. 06110 deodorising urinal screen - orange, mango scent
SLA 11A - Supply No. 06111 deodorising urinal screen - red, kiwi and grapefruit scen
SLA 11B - Supply No. 06112 deodorising urinal screen - transparent, honeysuckle scent
SLA 11C - Supply No. 06113 deodorising urinal screen - blue, cotton bloom scent
SLR 02D - Supply No. 08024 mounting frame to the plasterboard for the urinal DOMINO
SLA 08 - Supply No. 06080 plastic siphon 5/4"
SLA 36 - Supply No. 06360 set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)

Technical Specification

- Operating voltage**
- SLP 17 24 V DC
 - SLP 17B 6 V
- Power input**
- operating by 24 V DC 7 W
 - operating by 6 V 3 W
- Active range** 0,6 - 0,75 m
- Recommended flow pressure** 0,1 - 0,6 MPa
- Rate of flow** 18 l/min (inf. data)
- Water inlet** male thread G 1/2"
- Water outlet** flushing head

