Ceramic Urinal with the Radar Flushing Unit
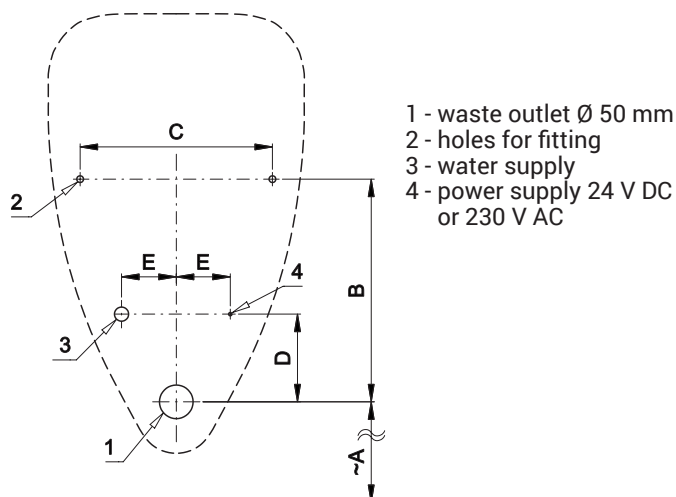# SLP 18RS

SLP 18 - NOVA PRO ALEX

Characteristics

- **includes Bluetooth control**
  (Sanela Control app available for download)
- **economy flushing by 1 liter of water**
- easy installation by the help of paper drill template
- whole flushing unit is placed behind the urinal
- system reacts only on the direct use of the urinal
  (it analyses changes, which are proceeded inside
  of the urinal, when a liquid is flowing through)
- adjustable flushing time 0,5 - 15,5 s
- parameter setting and communication with the electronics
  via the Sanela Control app (Bluetooth) or the SLD 04 remote
  control (acoustic indication of setting) without dismantling
  the urinal
- automatic flushing after each 6 hours non-use
- possibility to regulate a water flow by the angle valve
- radar flushing unit recharges a water to the siphon after
  each flushing

Installation Drawing

1 - waste outlet Ø 50 mm
2 - holes for fitting
3 - water supply
4 - power supply 24 V DC
    or 230 V AC

Dimensions (mm)	A	B	C	D	E
NOVA PRO ALEX	320	330	285	130	70

* for the height of the front edge of the urinal 650 mm above the floor

Technical Specification

Operating voltage
- SLP 18RS   24 V DC
- SLP 18RZ   230 V AC/50 Hz
- SLP 18RB   6 V

Power input
- operating by 24 V DC   8 W
- operating by 6 V   3 W

Recommended flow pressure   0,1 - 0,6 MPa
Rate of flow   18 l/min (inf. data)
Water inlet   male thread G 1/2"
Water outlet   inlet fitting with a rubber
                                   sealing

SLA 11

SLA 11A

SLA 11B

SLA 11C

Supply Specification

SLP 18RS -   Supply No. 11185
SLP 18RZ -   Supply No. 01185
SLP 18RB -   Supply No. 11187

ceramic urinal with radar flushing unit including Bluetooth module, electromagnetic
valve, connecting hoses, angle valve with filter and check valve, inlet fitting
with a rubber sealling, siphon, mounting set, paper drill template, power supply
(SLP 18RZ), 4 psc. AA alkaline batteries, 1,5 V 2700 mAh with battery case (SLP 18RB)

Radar Urinal Flushing Units

Recommended Accessories

SLZ 01Y -	**Supply No. 05012**	power supply 24 V DC for operating of max. 5 pcs. of flushing units
SLZ 01Z -	**Supply No. 05011**	power supply 24 V DC for operating of max. 9 pcs. of flushing units
SLZ 04Y -	**Supply No. 05042**	power supply 24 V DC on DIN rail, for operating of max. 5 pcs. of flushing units
SLZ 04Z -	**Supply No. 05041**	power supply 24 V DC on DIN rail, for operating of max. 9 pcs. of flushing units
SLZ 04X -	**Supply No. 10049**	power supply 24 V DC on DIN rail, for operating of max. 15 pcs. of flushing units
SLZ 06 -	**Supply No. 05060**	power supply 24 V DC for operating of max. 1 pc. of flushing unit
SLD 04 -	**Supply No. 07040**	remote control for an adjustment of parameters
SLA 11 -	**Supply No. 06110**	deodorising urinal screen - orange colour, mango scent
SLA 11A -	**Supply No. 06111**	deodorising urinal screen - red colour, kiwi and grapefruit scent
SLA 11B -	**Supply No. 06112**	deodorising urinal screen - transparent colour, honeysuckle scent
SLA 11C -	**Supply No. 06113**	deodorising urinal screen - blue colour, cotton bloom scent
SLR 09 -	**Supply No. 08090**	mounting frame for ceramic urinals with built-in flush or for ceramic washbasins
SLA 36 -	**Supply No. 06360**	set of 4 pcs. alkaline batteries AA 1,5 V, 2700 mAh (for models with index B)
SANELA CONTROL APP		available for download on the App Store and Play Store