

Coin and Token Shower Timers for One to Three Showers SLZA 01N, SLZA 01NZ



SLZA 01N




SLZA 01NZ

Characteristics





- hygienic flush
- vandal-proof
- choice of shower by the machine
 - after inserting a coin or a token the device assigns the shower to the user and shows the number of shower on display
- interactive control
 - after inserting a coin or a token the device starts water flow on several seconds to indicate the chosen shower
 - the user can start or stop the water directly in the shower
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- index Z - recessed
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time value, current euro exchange, display contrast, possibility switch off some from showers)
- marking of the buttons by symbols could be made to order
- the possibility of obtaining the statistical information, device diagnostics
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

Installation Drawing

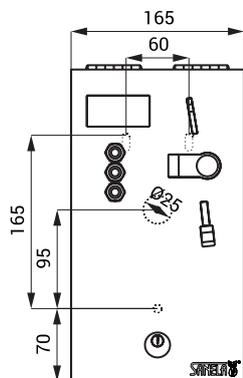

SLZA 01N

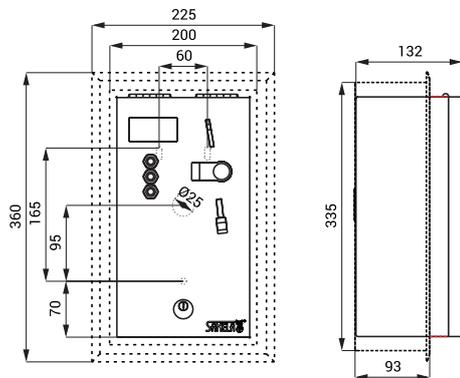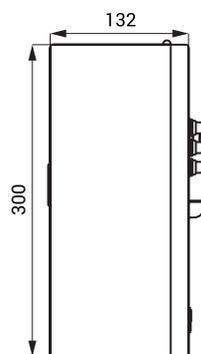

SLZA 01NZ

Technical Specification

Niche dimensions (index Z)	335 x 200 x 125 mm
Dimensions	
▪ SLZA 01N	300 x 165 x 132 mm
▪ SLZA 01NZ	360 x 225 x 132 mm
Weight	
▪ SLZA 01N	4,1 kg
▪ SLZA 01NZ	6,2 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	26 W
	(depends on the accessories and the number of showers)
Accepted coins	1 and 2 €, token (other currencies on request)
Switch on delay	0 - 255 sec., standard 30 sec.
Showering time	5 - 1200 sec.

Supply Specification

- SLZA 01N - Supply No. 88013** stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.)
- SLZA 01NZ - Supply No. 88014** stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

Required Accessories



SLZA 20P	88207	Shower control with piezo button - premixed water
-----------------	--------------	--



SLZA 20PH	88208	Shower control with piezo button - for cold and hot water, temperature regulated by mixer
------------------	--------------	--



SLZA 20PT	88209	Shower control with piezo button - for cold and hot water, temperature regulated by thermostatic mixer
------------------	--------------	---

- thermostatic valve nut spanner *SLA 64*



SLZA 21P	88217	Stainless steel shower panel with piezo button - premixed water
-----------------	--------------	---



SLZA 21PH	88218	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by mixer
------------------	--------------	---



SLZA 21PT	88219	Stainless steel shower panel with piezo button - for cold and hot water, temperature regulated by thermostatic mixer
------------------	--------------	--

Recommended Accessories

SLZ 01Y	-	Supply No. 05012	power supply 24 V DC for operating of max. 5 pcs. of showers
SLZ 01Z	-	Supply No. 05011	power supply 24 V DC for operating of max. 9 pcs. of showers
SLZ 04Y	-	Supply No. 05042	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLZ 04Z	-	Supply No. 05041	power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers
SLZ 04X	-	Supply No. 10049	power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers
SLD 05	-	Supply No. 07050	remote control for an adjustment of parameters
SLA 03	-	Supply No. 06030	vandal-proof shower head
SLA 39	-	Supply No. 06390	vandal-proof shower head
SLA 40	-	Supply No. 06400	vandal-proof shower head with possibility to set an angle of water flow
SLA 64	-	Supply No. 06640	thermostatic valve nut spanner (SLZA 20PT)
SLZA 50	-	Supply No. 88500	set of 50 pcs. of tokens for coin device